WAVES. WORLD. WIDE. our passion our playground our solutions



单4路RX多路耦合器-GTA7313.4 Ultra-Broad-Band (20-8000 MHz)

•	l'ém	0			0	* Aron	TATIC DISCHA	AND A	ن ۱	
-			·	00					and arready	
Imag	a for reference	only								

Image for reference only

...

• • •

TECHNICAL DATA

Type No.	1300140					
Number of inputs	1					
Number of outputs	4					
Frequency range	20 – 8000 MHz					
Gain [dB]	0 +/- 1.0					
Flatness [dB]	+/- 2.0 max.					
Noise Figure [dB]	12.0 max. (20100 MHz)					
	8.0 max. (above 100 MHz)					
OPIP3 [dBm]	+7 min. (206000 MHz)					
Isolation [dB]						
Out/out	18 min					
Out/in	40 min.					
VSWR						
Input	2.0:1 max.					
Output	1.5:1 max.					
Input power [dBm]						
Non-destructive	+5 max. (CW)					
Impedance [Ω]	50					
Connectors						
Input	N female					
Output	SMA female					

Power supply	80-264 V AC (47-63 Hz)				
Power consumption	<10VA				
Temperature range	Indoor use only				
Operating	-10 +50°C				
Storage	-20 +60°C				
Colour:	Front panel: RAL7021				
Attached hardware	Power cord				
	Operating manual				
Dimensions (wxhxd)	483mm x 44mm x 360mm				
	(19" drawer, 1U)				
Weight	4.3 kg				
Features					
Redundant power supply					

Note: Unused outputs have to be terminated using a 50Ω load in order to comply with the specifications

OPTIONS

The following options are available:

- Single power supply
- DC power supply

- Mixed power supply (AC and DC)
- Amplifier monitoring

.

.






.



APPLICATIONS

The fundamental application of a receiver (RX) multicoupler is to enable multiple radio receivers, spectrum analyzers or scanners, to share a common signal source like antennas, signal generators or reference clocks. Any incoming signal will be distributed without loss.

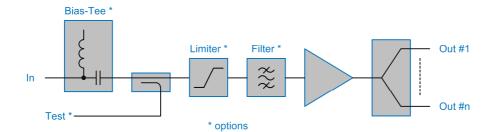

DESCRIPTION

The GTA7313.4 is able to process extremely broad band signals. The frequency range starts at 20MHz (VHF) and extends to 8000MHz (SHF). With that the GTA7313.4 can be used for distribution of radio signals as well as L-band, WLAN or telecommunication signals. Especially the usage in automated test equipments saves time-consuming rewiring procedures.

ABOUT US

novotronik is a Germany-based electronics engineering company. **novotronik** specialises in meeting the needs of government and defence, telecommunication, broadcast and aerospace. We have about 25 years experience producing state of the art technology for your applications.

OUR SKILLS

novotronik develops and manufactures technically sophisticated products. As a **certified aerospace and defence company novotronik** operates a quality management system in accordance with ISO 9001:2015 and EN 9100:2018 (equivalent to AS 9100D and JISQ 9100:2016 including ISO 9001:2015).





您需要详细信息?请现在通过sales@hkaco.com联系我们。 免费电话: 400-999-3848 您身边的测试测量专家:北京 | 上海 | 深圳 | 西安 | 广州 | 成都 | 武汉 | 香港 | 台湾 | 美国